ANNEX 23 – TRAPEZ 250/40 (Cobacier 1004) (Ref. RXX)

Macrolux® Rooflite® TRAPEZ 250/40

Section

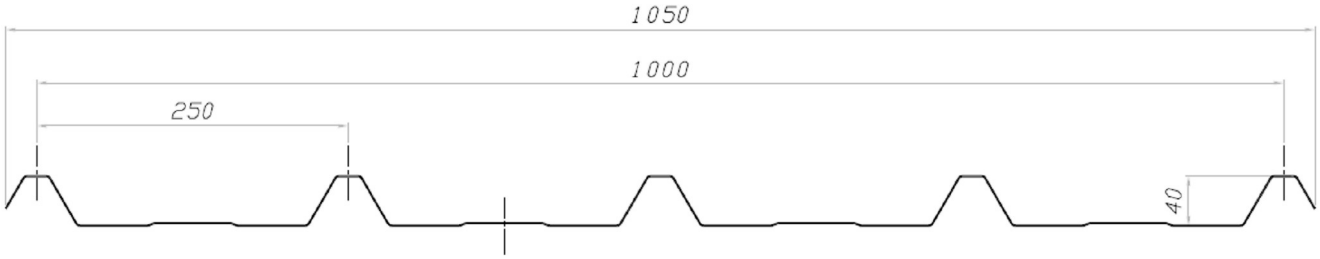

✓ COBACIER 1004

CODE	E383	E352	
THICKNESSES	0.9 mm	1.0 mm	
WEIGHT	1.305 kg/m^2	1.45 kg/m^2	
WIDTH	**Nominal (Sheet max) 1.050 mm**		**Useable 1.000 mm**
LENGTH	6.000 mm		
AVAILABLE COLOURS	Clear Opal		
THERMAL EXPANSION	0.065 mm/m °C (6.5 x 10^{-5} 1/°C)		
MINIMUM RADIUS OF CURVATURE	9.000 mm		
MINIMUM SLOPE	5%		
RECOMMENDED FIXING	Self-drilling 6.3x80mm with EPDM gasket (every 250 mm) Self-tapping for wood 6.5x100mm with EPDM gasket (max every 250 mm) Seaming plug (max every 300 mm)		
SPACER MADE OF FOAMED PE	Not available		

✓ **LOAD VALUES (*) FOR EVENLY DISTRIBUTED LOAD**

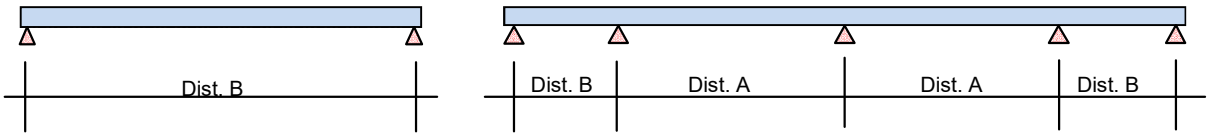

Thickness mm	Distance A				Distance B			
	600 N/m^2	900 N/m^2	1.200 N/m^2	1.500 N/m^2	600 N/m^2	900 N/m^2	1.200 N/m^2	1.500 N/m^2
0.9	1.400	1.250	1.200	1.100	1.100	1.000	950	900
1.0	1.450	1.300	1.250	1.150	1.150	1.050	1.000	950

(*) Ultimate load values (safety coefficient 1.5)

Purchase of Macrolux® Rooflite® sheets is subject to reserves, please check general sales conditions from our offices. Customised lengths manufactured upon minimum amounts of order. Colours provided per request upon minimum amounts of orders. Illustrative drawings, check tolerance (weight, dimensions, width, pitch) from our offices. For further laying conditions see the Macrolux® Rooflite® technical manual. All other company or product names, herein mentioned are registered trademarks belonging to the owners in question. Dimensional tolerances in according to EN 1013